


■ Fisa plata izolata, mama 0.5 - 6 mm²

Sectiune mm ²	Cod	Culoare	Cote conf. DIN	Gros. mat.	Latime	Dimensiune mm			Material izolant	Greutate/ 100 buc ~ kg	buc/cutie
						l1	l2	s			
4-6	8503	■		0.8	4.8	23.0	7.5	0.45	PA	0.138	100
	750	■	6.3 – 6	0.8	6.3	21.0	7.5	0.45	PVC	0.100	100
	7509	■		1.2	9.5	26.5	12.0	0.45	PVC	0.150	100

■ Fisa plata izolata, mama 0.5 - 6 mm²

- Pentru conductoare multifilare fine si extrafine
- Produs din bronz de calitate care ofera caracteristici optime de sertizare si contact electric



Caracteristici


- Izolatie sintetica: PVC
- Codificare pe culori dupa normele in vigoare

Material

- CuSnZn (bronz)

Suprafata


- Stanata



Sectiune mm ²	Cod	Culoare	Cote conf. DIN	Gros. mat.	Latime	Dimensiune mm			Material izolant	Greutate/ 100 buc ~ kg	buc/cutie
						l1	l2	s			
0.5-1	720BZ	■	6.3 – 1	0.8	6.3	22	7.5	0.45	PVC	0.09	100
1.5-2.5	730BZ	■	6.3 – 2.5	0.8	6.3	21	7.4	0.45	PVC	0.09	100
4-6	750BZ	■	6.3 – 6	0.8	6.3	21	7.5	0.45	PVC	0.10	100

■ Fisa plata izolata cu derivatie
0.5 - 6 mm²

- Pentru conductoare multifilare fine si extrafine



Caracteristici


- Izolatie sintetica: PVC
- Codificare pe culori dupa normele in vigoare

Material

- CuZn (alama)

Suprafata

- Stanata

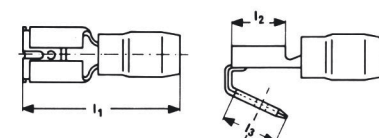

Sectiune mm ²	Cod	Culoare	Gros. mat.	Latime	Dimensiune mm				Material izolant	Greutate/ 100 buc ~ kg	buc/cutie
					l1	l2	l3	s			
0.5-1	720AZ	■	0.8	6.3	22	7.5	8	0.4	PVC	0.11	100
1.5-2.5	730AZ	■	0.8	6.3	22	7.5	8	0.4	PVC	0.11	100
4-6	750AZ	■	0.8	6.3	25	8.0	8	0.4	PVC	0.18	100