


VP-32A



VP-40A

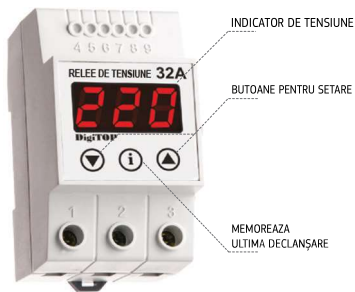

VP-50A



VP-63A



PARAMETRII TEHNICI

- curentul nominal in sarcina:
- curentul maxim in sarcina:
- tensiunea masurata:
- timpul de oprire la limita superioara:
- timpul de oprire la limita inferioara:
- limita inferioara de oprire a tensiunii (programabila):
- limita superioara de oprire a tensiunii (programabila):
- timpul de intarziere al pornirii (programabil):
- eroare voltmetru:
- *- setari din fabrica

VP-16A	VP-20A	VP-32A	VP-40A	VP-50A	VP-63A
--------	--------	--------	--------	--------	--------

10A	20A	32A	40A	50A	63A
16A	30A	40A	50A	60A	80A
50-400 V					
0,02 sec.					
I(120-170V), 0,02(<120V) sec. nu mai mult					
120-200 (170*) V					
210-270 (250*) V					
5-600(15*) sec.					
1%					