



Conectica izolata tip auto



■ Fisa plata izolata, tata 0.5 - 6 mm<sup>2</sup>

■ Pentru conductoare multifilare fine si extrafine

Caracteristici


- Izolatie sintetica: poliamida / PVC (varianta cu X in cod)
- Codificare pe culori dupa normele in vigoare

Material

- CuZn (alama)

Suprafata

- Stanata

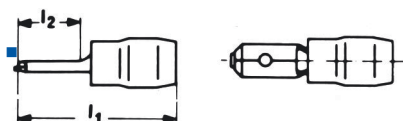

Sectiune mm <sup>2</sup>	Cod	Culoare	Gros. mat.	Latime	Dimensiune mm			Material izolant	Greutate/ 100 buc. ~ kg	buc/cutie
					l1	l2	s			
0.5-1	8201C	■	0.5	2.8	22.0	11.5	0.4	PA	0.040	100
	8201B	■	0.8	2.8	14.6	5.5	0.4	PVC	0.060	100
	8202B	■	0.5	4.8	22.0	11.5	0.5	PA	0.070	100
	8203B	■	0.8	4.8	22.0	11.5	0.4	PA	0.070	100
	820	■	0.8	6.3	22.0	8.0	0.4	PVC	0.060	100
1.5-2.5	8302B	■	0.5	4.8	22.0	11.5	0.5	PA	0.070	100
	8303B	■	0.8	4.8	22.0	11.5	0.4	PA	0.070	100
	830	■	0.8	6.3	22.0	8.0	0.4	PVC	0.065	100
4-6	8502B	■	0.5	4.8	24.5	10.5	0.4	PA	0.120	100
	8503B	■	0.8	4.8	24.5	10.5	0.4	PA	0.120	100
	850	■	0.8	6.3	22.0	8.0	0.4	PVC	0.110	100