




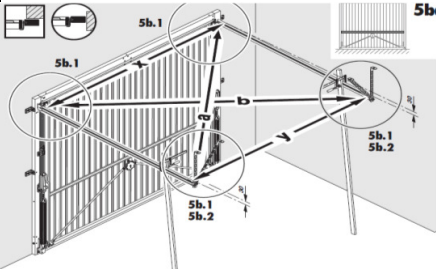









Hormann Romania srl str. Complexului nr 15 com Chiajna, Ilfov	<b>Fisa tehnica</b> <b>Usa basculanta GSL</b>	<b>Dedeman</b>	
<b>23.10.2015</b>		<b>Caracteristici produs</b>	
Producator	Hörmann, Germania		
Denumire	<b>Usa basculanta Light</b>		
Foaie usa	Foaie tabla otel, suprafata coaja de porocala		
Culoare RAL	RAL 8028 ( Maro); RAL 9016 (Alb);		
Elemente siguranta		Capace protectie flexibile ( amplasate deasupra bratelor de parghie)	
		Sistem de arc multiplu , asigura usa impotriva caderii. Distanțele dintre spiarele arcurilor este atat de mica , incat nici macar degetele copiilor nu se pot prinde in ele.	
		Protectie anti-efractie. Sistemul unic de blocare cu piedica al usilor basculante Hormann fixeaza colturile blatului usii strans pe rama.	
		Sina de culisare profilata unic	
Standard de siguranta	EN 13241-1		
Mod de operare standard	Maner plastic PVC		
	<b>Modalitate montaj:</b> <b>Montaj in gol:</b> + 125mm latime; + 50 mm inaltime ex. dim.com: 2500x2125mm ex.dim.necesare montaj in gol: 2625mmx2175mm.  <b>Montaj in spatele golului:</b> dim. de comanda = dim. necesara montaj in spatele golului (diferente permise pentru montajul in spatele golului: max. - 30 mm/ max. 90 mm latime; max. - 30 mm/ max. 30 mm inaltime;		
<b>Izolatie ( optional)</b>	Usa poate fi izolata, in regim propriu. min. 6 kg/ m <sup>2</sup> ; max. 10 kg/m <sup>2</sup> grosime izolatii: max 16mm.		
<b>Accesorii optionale:</b>			
Actionare electrica Liftronic 500		Forta max. 500N, viteza max. cca. 10,5 cm/s; Tensiunea de operare 230/240 V AC; Include 2 telecomenzi RCS 2, 433 MHz; Suprafata maxima : 7 m <sup>2</sup> ; Latime maxima : 3000mm; Inaltime max : 2750mm usa basculanta; 2250 mm usa sectionala Adancime 3260mm	
Accesorii optionale:	cablu de urgenta usa basculanta		
		telecomanda suplimentara RCS 2, frecventa 433 MHZ	
		telecomanda suplimentara tip bricheta (pentru automobil)	
		buton de interior	
		tastatura cod radio	
		selector cu cheie	
		bariera luminoasa ( fotocelule)	
durata medie de exploatare	10 ani - usa basculanta; 3 ani actionare electrica		
perioada de garantie	2 ani - usa basculanta; actionare electrica		