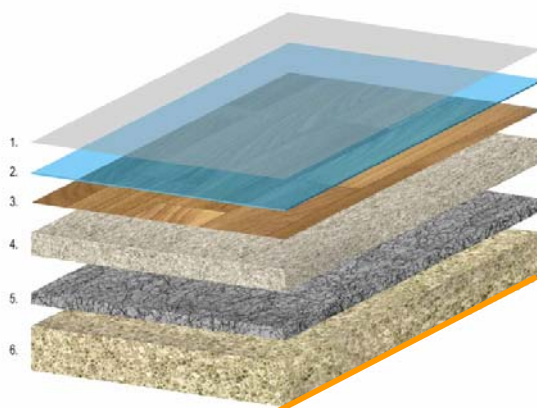


PRODUCT DATA SHEET
PRODUCT NAME:
OPTIMA
PRODUCT STRUCTURE


1. additional coat-EXTREME protection
dodatna zaštita-EXTREME lak
2. wear layer
zaštitni transparentni sloj
3. design colour
štampa dezena
4. intermediate foam layer
penasti međusloj
5. saturant layer reinforced by glass fibres
kompaktni premaz ojačan staklenim filisom
6. back coat-foam layer+compact layer
poledinski penasti sloj

TECHNICAL/MARKETING PRODUCT CHARACTERISTIC

Resilient Residential PVC floor covering, EN 653	standard	OPTIMA
Classification, EN 685	22	
Product characteristics		
Overall thickness, mm	EN 428	1,4
Wear layer thickness, mm	EN 429	0,20
Total mass, g/m ²	EN 430	1400
Additional PU protection		Extreme
Marketing characteristics		
Roll length 2,5/3,0/3,5m widths, m	EN 426	45 (15-45)
Roll length 4m width, m	EN 426	40 (15-40)
Widths required, m	EN 426	2,5 / 3 / 3,5 / 4
Branded		Tarkett
Back printing		yes
Back embossing		no
Guarantee, year		15
Installation method		
Loose lay		≤ 20 m²
Adhesive		> 20 m²
Welding		cold
Underfloor heating		suitable

TARGET PRODUCT CHARACTERISTICS

	Standard	unit	value
Surface characteristics			
Scratch resistance	internal		excellent
Stain resistance	EN 423		excellent
Alkali resistance	EN 423	pH	12
Castor chair	EN 425		very good
Simulated movement of a furniture leg resistance	EN 424		excellent
Target gloss	internal	%	22
Physical performance			
Indentation	EN 433	mm	0,3-0,5
Residual indentation	EN 433	mm	< 0,2
Resilient indentation	EN 433	%	> 75
Wear resistance	prEN 660-1	group	T
Impact resistance	internal		very good
Tear resistance	internal		very good
Curl	EN 434	mm	< 4,0
Light fastness (blue scale)	EN 20105 B02		7/8
Electrical resistance	pr EN 1081		neutral
Dimensional stability	EN 434	%	< -0,02 lw < -0,02 cw
Sound absorption, ΔL	EN ISO 717-2	dB	9
Heat insulation	DIN 52612	m ² K/W	0,018-0,02
Water absorption	EN 661	g/100cm ²	<0,06
Fire resistance	EN 13501-1	class	Bfl-s1